

# ProColor 752U

Students will see everything with Boxlight's vibrant 75" ProColor interactive LCD flat panel Android display. Touch technology and collaboration are brought to life with the brilliance of 4K ultra high-definition.



## Features

- 75" interactive flat panel display.
- Up to 20 single-point users or 10 dual-touch and gestures users with Touch 360° interactivity, driving collaborative learning to a new level.\*
- Built-in Android OS for touch control plus Whiteboard app.
- 4K video resolution (3,840 x 2,160).
- LED backlighting for energy efficiency.
- Includes MimioStudio™ classroom software with 3-device MimioMobile™ license.

\* Multi-touch available on Windows systems. Mac and Linux are single touch.

## Options

- Internal Windows 10 PC (available with Intel i5 or i7)
- Wall mount
- Android module
- Wi-Fi module

## Specifications

Dimensions and Weight	
Overall Dimensions (W x H x D)	1,764 mm x 1,043 mm x 100 mm (69.5 in. x 41.1 in. x 3.9 in.)
Net Weight	58 kg (127.7 lb.)
Packaged Dimensions (W x H x D)	1,913 mm x 1,225 mm x 280 mm (75.3 in. x 48.2 in. x 11.0 in.)
Gross Weight	82 kg (180.8 lb.)
Effective Screen Size (W x H)	1,650 mm x 928 mm (65.0 in. x 36.5 in.)
Active Screen Size (Diagonal)	75 in.
Image	
Display Format Native Resolution	3,840 x 2,160
Aspect Ratio	16:9
Picture Response Time (Gray to Gray)	8 ms
Refresh Frequency	60 Hz
Pixel Pitch	0.43 mm x 0.43 mm
Panel Resolution	3,840 x 2,160
Display Colors	1.07 B (10-bit)
Brightness (typical)	330 nits

Contrast Ratio	1,200:1
Viewing Angle	Hor. 178°, Ver. 178°
Backlight Life (estimated)	50,000 hours
<b>Touch Tracking</b>	
Tracking Technology	Touch 360° Infrared
Touch Points Operating Systems	20-touch: Windows 7+ Single touch: Mac OS 10.8+, Linux, Chrome
Touch Tool	Stylus, finger (even if gloved), or solid object
Tracking Accuracy	+/-2mm (0 in.)
Tracking Read Speed	>125 frames/s
Tracking Response Time	15 ms (typical)
Tracking Points	32,767 x 32,767
<b>Safety</b>	
Anti-Glare Glass	Yes
Protective Glass	4 mm tempered glass Level 7 Mohs
<b>Connections</b>	
Input/Output	Input: - VGA x 1 - HDMI x 2 - HDMI 4K2K x 1 - PC audio x 1 - DisplayPort x 1 Output: - HDMI x 1 - Earphone out x 1 - Digital audio output coax x 1 USB: - USB 2.0 x 3 (2 in front, 1 on side) - USB 3.0 x 1 (side)

Audio	
Output	12 W x 2
Sound System	Stereo
Equalizer	Yes
Sound Status Memory	Yes
Balance	Yes
Environmental	
Storage Temperature	-20° to 60° C (-4° to 122° F)
Storage Humidity	10% to 90%
Operating Temperature	0° to 40° C (32° to 104° F)
Operating Humidity	10% to 90%
Power Requirement	100–240 VAC 60/50 Hz
Power Consumption (Operating)	400 W
Power Consumption (Sleep Mode)	<0.5 W
Mount	
Mounting Screw Size	M8 x 25 mm
VESA Form Factor	600 x 400 mm
Accessories	
HDMI Cable	1 x 5 m
AC Power Cable	1 x 3 m
USB Cable	1 x 5 m

Passive Stylus	3 x magnetic
Remote Control	1 (with batteries)
Wall Mount	Optional
Internal PC Module	Optional
<b>Android</b>	
Version	Android 5.1 "Jelly Bean"
CPU	ARM Cortex A53 Dual Core
GPU	Quad Core
RAM	2 GB
ROM	16 GB

## What's in the box:

### Hardware

- Magnetic stylus x 3
- Remote control with batteries


### Documentation

- MimioStudio license
- Warranty card
- QuickStart Guide


### Cables

- HDMI cable (5 m)
- USB A-to-B for touch (5 m)
- US power cord (3 m)

## Drawings

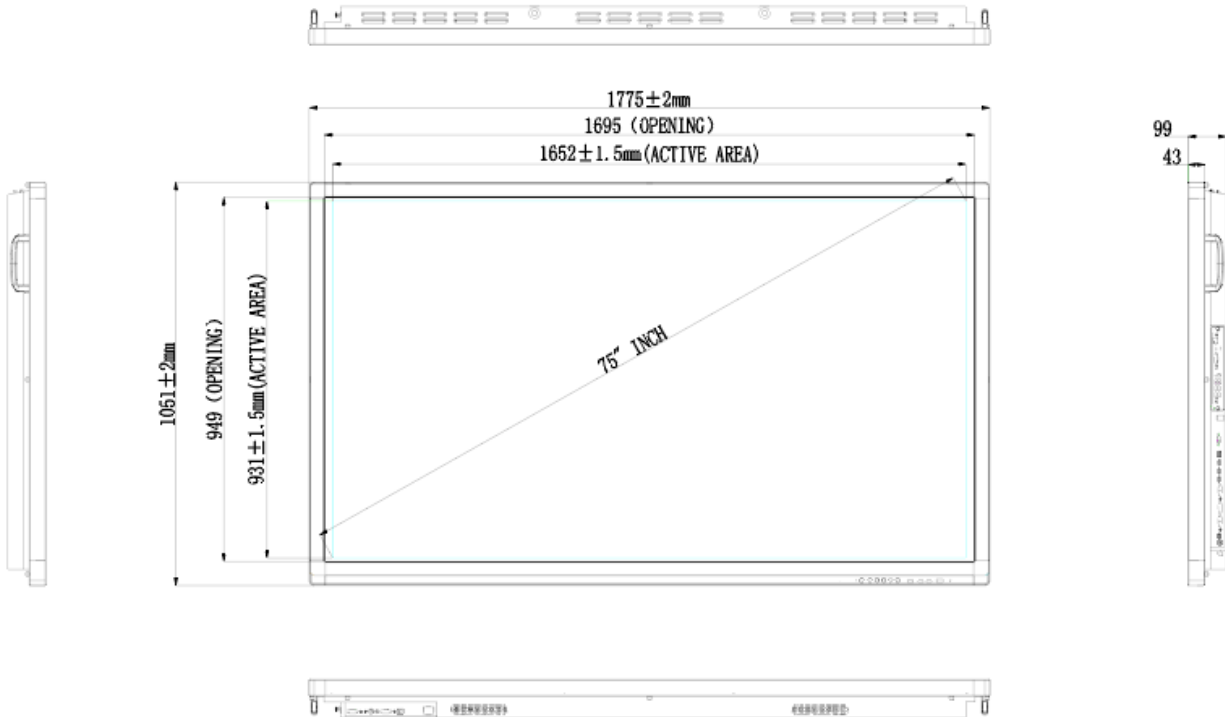

## Connections

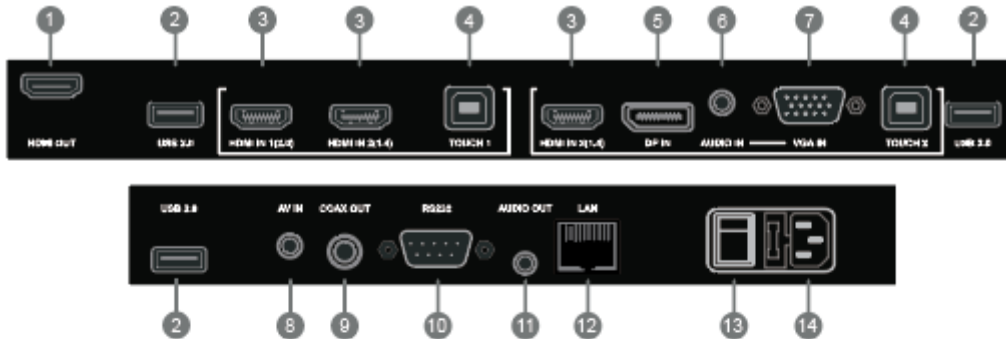

Items	Function description
① HDMI OUT	Connected to the devices with HDMI input function
② USB	Connect USB devices such as mobile hard disk, U disk, USB keyboard and mouse, USB drives, etc.
③ HDMI IN	High-definition multimedia interface signal input, connect to PC with HDMI output, set-top box, or other video device
④ TOUCH	Touch signal output to the external computer
⑤ DP	Connected to devices with DisplayPort output function
⑥ AUDIO IN	External computer audio input
⑦ VGA IN	External computer image input
⑧ AV IN	Composite video and audio input
⑨ COAX OUT	Coaxial output
⑩ RS232	Serial interface, used for mutual transfer of data between devices
⑪ AUDIO OUT	Audio output to the external speaker
⑫ LAN	Connecting RJ45 terminals
⑬ AC SWITCH	To open or shut down AC power supply. " I " means power on, " O " means power off
⑭ AC IN	AC power input, connecting AC power supply

Specifications are subject to change without notice.